

TECHNICAL DATASHEET

NEG ARG FIBRE ACS13H530X



High Zirconia 19%+ Alkali Resistant Glass Fibre

Product Name ACS13H530X	Product Type Chopped Strand	Uses Premix GRC & Shrinkage Control in Concrete
--	--	--



A=Alkali Resistant CS=Chopped Strand 13=Chopped Length
H530=Sizing X=200 Filaments

ACS13H530X is very widely used and is suitable for all premix GRC applications. It is also used for plastic shrinkage crack control in concrete.

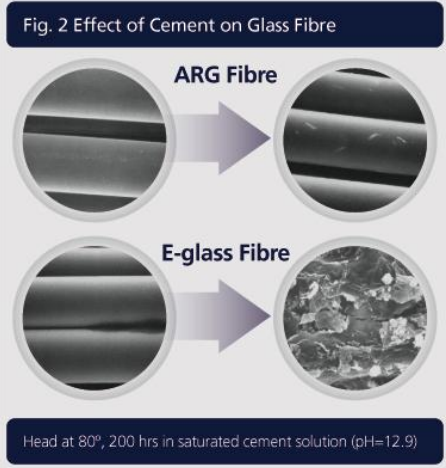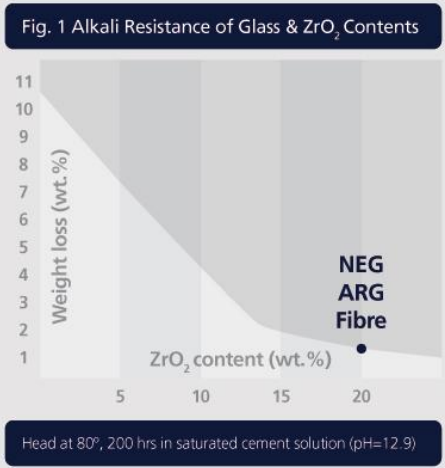

Properties		Advantages
Type of Glass	Alkali Resistant	High Zirconia Content Excellent Integrity During Mixing Suitable for All Premix Applications Proven Japanese Quality
Filament Diameter μ	13.50	
Filaments per Strand	200	
Zirconia Content	Minimum 19%	
Moisture Content	< 0.5%	

ACS13H530X is supplied in Bags
 20 kgs each
 33 per pallet
 Net weight 660kgs Gross weight 702kgs
 144 x 115 x 107cm



For further information contact:
 Fibre Technologies International Limited
 Avonmouth Way
 Avonmouth
 Bristol BS11 9YA

☎: +44 (0)117 9825855
 Fax: +44 (0)117 9820060
 info@fibretch.org
 www.fibretch.org

