



NEG ARG FIBRE ACS13H530X
High Zirconia Alkali Resistant Glass Fibre

Product Name ACS13H530X	Product Type Chopped Strand	Uses Premix GRC & Shrinkage Control in Concrete
-----------------------------------	---------------------------------------	---



A=Alkali Resistant CS=Chopped Strand 13=Chopped Length
H530=Sizing X=200 Filaments

ACS13H530X is very widely used and is suitable for all premix GRC applications. It is also used for plastic shrinkage crack control in control.

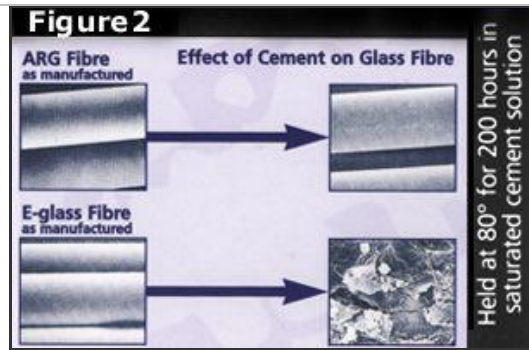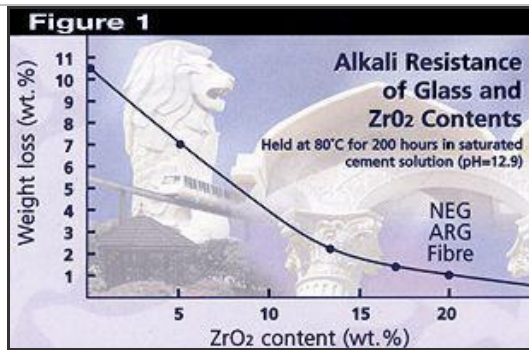

Properties		Advantages
Type of Glass	Alkali Resistant	High Zirconia Content Excellent Integrity During Mixing Suitable for All Premix Applications Proven Japanese Quality
Filament Diameter μ	13.50	
Filaments per Strand	200	
Zirconia Content	Minimum 17%	
Moisture Content	< 0.5%	

ACS13H530X is supplied in Bags
20 kgs each
30 per pallet
Net weight 600kgs Gross weight 642kgs
144 x 115 x 107cm



SUPPLIED BY FIBRE TECHNOLOGIES INTERNATIONAL

For further information contact:

Fibre Technologies International Limited
Avonmouth Way
Avonmouth
Bristol BS11 9YA

☎: +44 (0)117 9825855
Fax: +44 (0)117 9820060
info@fibretch.org
www.fibretch.org

MEMBERS OF THE INTERNATIONAL GLASSFIBRE REINFORCED CONCRETE ASSOCIATION

