



NEG ARG FIBRE AR2500H103 High Zirconia Alkali Resistant Glass Fibre

Product Name AR2500H103	Product Type Roving	Uses Spray Applications
--	--------------------------------------	--




A=Alkali Resistant R=Roving 2500=Roving Tex in g/1000m H103=Sizing

AR2500H103 is a very widely used roving for all spray applications. The special H103 sizing makes compaction easy and this fibre is therefore ideally suited for all architectural products. The High Zirconia content ensures long-term durability. The fibre runs smoothly from the roving to the spray gun where it chops easily but maintains its integrity during spraying.

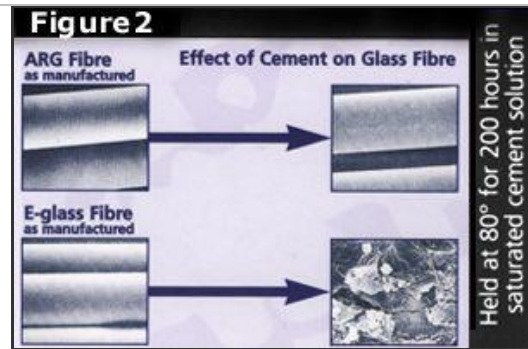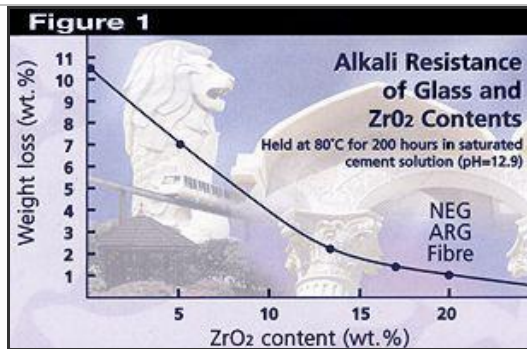

Properties		Advantages
Type of Glass	Alkali Resistant	High Zirconia Content Sprays and Compacts Easily Good Integrity Chops Easily in Spray Gun Proven Japanese Quality
Roving Tex (g/1000m)	2500 nominal	
Strand Tex	78	
Filaments per Strand	200	
Zirconia Content	Minimum 17%	
Moisture Content	< 0.5%	

AR2500H103 is supplied in Rovings
20kgs each
48 per pallet
Net weight 960kgs Gross weight 983kgs
113 x 113 x 94cm



SUPPLIED BY FIBRE TECHNOLOGIES INTERNATIONAL

For further information contact:

Fibre Technologies International Limited
Avonmouth Way
Avonmouth
Bristol BS11 9YA

☎: +44 (0)117 9825855
Fax: +44 (0)117 9820060
info@fibretch.org
www.fibretch.org

MEMBERS OF THE INTERNATIONAL GLASSFIBRE REINFORCED CONCRETE ASSOCIATION

