

NEG ARG FIBRE AR2500H200



High Zirconia Alkali Resistant Glass Fibre

Product Name AR2500H200	Product Type Roving	Uses Spray Applications
--	--------------------------------------	--




A=Alkali Resistant R=Roving 2500=Roving Tex in g/1000m H200=Sizing

AR2500H200 is a stiffer fibre than AR2500H103 and it has advantages when used for producing flat products by automated and semi automated processes. The high zirconia content and special sizing give excellent long term durability.

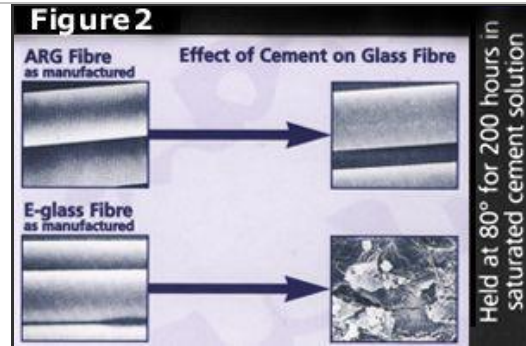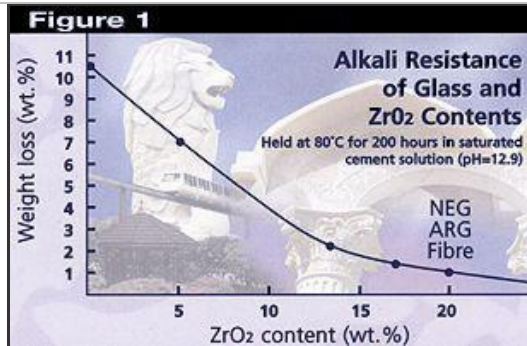

Properties		Advantages
Type of Glass	Alkali Resistant	High Zirconia Content Sprays and Compacts Easily Long Term Durability Automated Spray Systems Proven Japanese Quality
Roving Tex (g/1000m)	2500 nominal	
Strand Tex	78	
Filaments per Strand	200	
Zirconia Content	Minimum 17%	
Moisture Content	< 0.5%	

AR2500H200 is supplied in Rovings
 20kgs each
 48 per pallet
 Net weight 960kgs Gross weight 983kgs
 113 x 113 x 94cm



SUPPLIED BY FIBRE TECHNOLOGIES INTERNATIONAL

For further information contact:

Fibre Technologies International Limited
 Avonmouth Way
 Avonmouth
 Bristol BS11 9YA

☎: +44 (0)117 9825855
 Fax: +44 (0)117 9820060
 info@fibretch.org
 www.fibretch.org

MEMBERS OF THE INTERNATIONAL GLASSFIBRE REINFORCED CONCRETE ASSOCIATION



Certificate No. AJA01/2902