
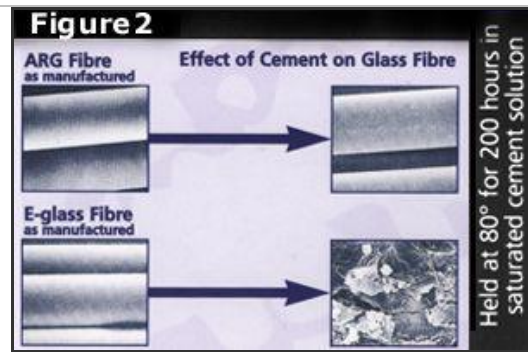


### NEG ARG FIBRE AR5000H350Y High Zirconia Alkali Resistant Glass Fibre


<b>Product Name</b> <b>AR5000H350Y</b>	<b>Product Type</b> <b>Roving</b>	<b>Uses</b> <b>Spray Applications</b>
		
<p>A=Alkali Resistant R=Roving 5000=Roving Tex in g/1000m H350Y=Sizing</p>		

AR5000H350Y is a higher Tex version of AR2500H350Y. In a given time, twice as much fibre is chopped and sprayed when compared to 2500 Tex fibres.

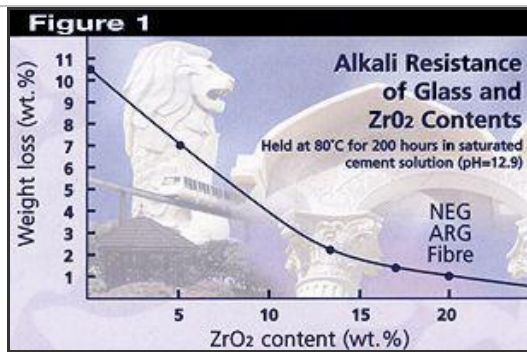

<b>Properties</b>		<b>Advantages</b>
Type of Glass	Alkali Resistant	High Zirconia Content Effective at Lower Fibre % Long Term Durability Suitable for High Output Systems Proven Japanese Quality
Roving Tex (g/1000m)	5000 nominal	
Strand Tex	78	
Filaments per Strand	100	
Zirconia Content	Minimum 17%	
Moisture Content	< 0.5%	

AR5000H350Y is supplied in Rovings  
 19.5 kgs each  
 48 per pallet  
 Net weight 936kgs Gross weight 959kgs  
 113 x 113 x 94cm



**SUPPLIED BY FIBRE TECHNOLOGIES INTERNATIONAL**

**For further information contact:**

Fibre Technologies International Limited  
 Avonmouth Way  
 Avonmouth  
 Bristol BS11 9YA  
 MEMBERS OF THE INTERNATIONAL GLASSFIBRE REINFORCED CONCRETE ASSOCIATION

☎: +44 (0)117 9825855  
 Fax: +44 (0)117 9820060  
 info@fibretch.org  
 www.fibretch.org

