



NEG ARG FIBRE AR5000H530X
High Zirconia Alkali Resistant Glass Fibre

Product Name AR5000H530X	Product Type Roving	Uses Premix
------------------------------------	-------------------------------	-----------------------



A=Alkali Resistant R=Roving 5000=Roving Tex in g/1000m H530X=Sizing

AR5000H530X is the popular premix fibre but in roving form. This allows the customer to chop the fibre to the desired length. This fibre can also be dispensed directly into the mixer via a multi roving chopping system.

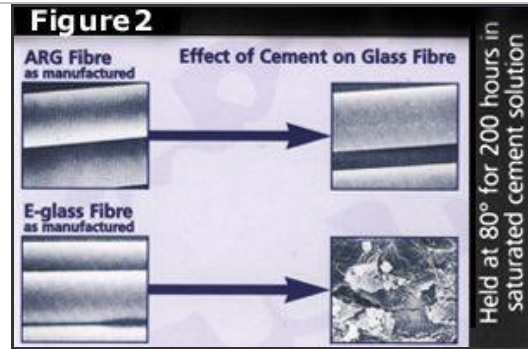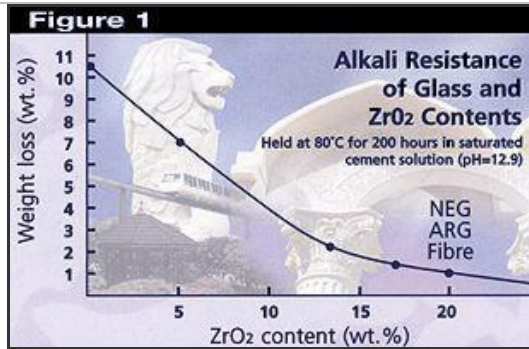

Properties		Advantages
Type of Glass	Alkali Resistant	High Zirconia Content Can be Cut to Required Length High Integrity During Mixing Suitable for High Output Systems Proven Japanese Quality
Roving Tex (g/1000m)	5000 nominal	
Strand Tex	78	
Filaments per Strand	200	
Zirconia Content	Minimum 17%	
Moisture Content	< 0.5%	

AR5000H530X is supplied in Rovings
19.5 kgs each
48 per pallet
Net weight 936kgs Gross weight 959kgs
113 x 113 x 94cm



SUPPLIED BY FIBRE TECHNOLOGIES INTERNATIONAL

For further information contact:

Fibre Technologies International Limited
Avonmouth Way
Avonmouth
Bristol BS11 9YA

☎: +44 (0)117 9825855
Fax: +44 (0)117 9820060
info@fibretch.org
www.fibretch.org

MEMBERS OF THE INTERNATIONAL GLASSFIBRE REINFORCED CONCRETE ASSOCIATION

