



NEG ARG FIBRE ACS13H350Y
High Zirconia Alkali Resistant Glass Fibre

Product Name ACS13H350Y	Product Type Chopped Strand	Uses Premix GRC & Renders
-----------------------------------	---------------------------------------	---



A=Alkali Resistant CS=Chopped Strand 13=Chopped Length
H350=Sizing Y=100 Filaments

ACS13H350Y has good strand integrity during mixing and is very effective at lower fibre percentages 1.5 – 2.5%

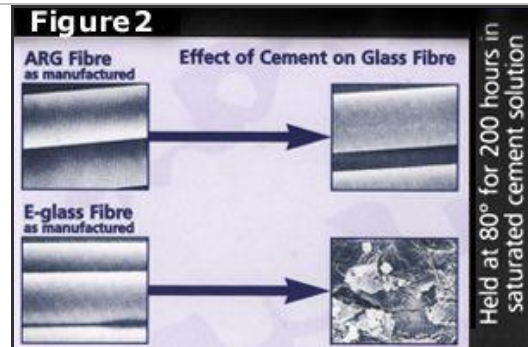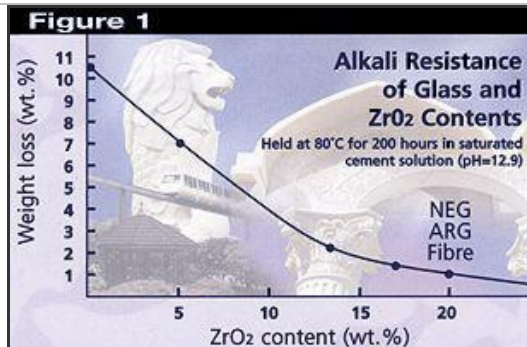

Properties		Advantages
Type of Glass	Alkali Resistant	High Zirconia Content Effective at Lower Fibre % Good Integrity During Mixing Reinforces Cement Renders Proven Japanese Quality
Filament Diameter μ	13.50	
Filaments per Strand	100	
Zirconia Content	Minimum 17%	
Moisture Content	< 0.5%	

ACS13H350Y is supplied in Bags
20 kgs each
25 per pallet
Net weight 500kgs Gross weight 542kgs
144 x 115 x 107cm



SUPPLIED BY FIBRE TECHNOLOGIES INTERNATIONAL

For further information contact:

Fibre Technologies International Limited
Avonmouth Way
Avonmouth
Bristol BS11 9YA

☎: +44 (0)117 9825855
Fax: +44 (0)117 9820060
info@fibretch.org
www.fibretch.org

MEMBERS OF THE INTERNATIONAL GLASSFIBRE REINFORCED CONCRETE ASSOCIATION



Certificate No. AJA01/2902